Cleaning & Maintenance for Kitchen Worktops

Dekton® Manual





Normal Maintenance

Due to its practically zero porosity, the ultra-compact Dekton® surface is highly resistant to staining in day-to-day use and from chemical products, making it ideal for use as a kitchen worktop and as a surface for other kinds of work, both inside and out.

For general cleaning, Cosentino recommends the use of Q-Action with a sponge or a sponge with soft fibres. If this product is not available, the best option is to use a neutral soap and water.



Cleaning Stubborn Stains

In the case of aggressive stains, either from products that are resistant to normal cleaning agents or because they have remained on the work surface without being removed, we recommend using more specific products such as: solvents (acetone or universal solvent type).

The accompanying table shows the various types of stains with their corresponding cleaning products.

Acid cleaning products can include any of product that contains acid or descaling agent etc. Alkaline products include basic cleaning agents, ammonia etc.

Solvents can include products such as universal solvent, turpentine (white spirit), acetone, alcohol etc. Oxidants include products such as hydrogen peroxide and diluted bleach.

Stain

Cleaning Product

Grease and oil	Alkaline detergent / solvent
Ink	Solvent
Rust	Acid
Limescale	Acid
Wine	Alkaline detergent / acid
Tyre rubber	Solvent
Ice cream	Alkaline detergent
Resin / nail varnish	Solvent
Coffee	Alkaline detergent / acid
Candle wax	Solvent
Residual cement	Acid
Gesso	Acid
Epoxy adhesive and grouting	Solvent
Cola	Oxidant
Fruit juices	Oxidant
Tar	Solvent
Nicotine	Solvent / oxidant

Prevention of Knocks

Although Dekton® is an extremely resistant surface, knocks should be avoided in areas which are more exposed (corners, edges, bevels etc.).

Performance in Contact with Hot Objects

Recipients such as frying pans, saucepans, casseroles and coffee makers etc. can be placed directly on the work surface after use. Electrical apparatuses which give of heat can also be placed on the unprotected surface. Dekton* is designed to withstand utensil temperatures from domestic use.*

For Dekton 8 mm it is necessary to use protection for hot objects.

Precauciones


- Avoid the direct contact with metal parts of electric broiler, cooking worktops or ovens that, in a bad installation get directly in contact with the material
- Avoid direct radiations in very high temperature such as chimney, barbecues, etc
- · Avoid direct contact with flame.
- For Dekton® Xgloss, avoid long contact with industrial objects in very high tempertures.
- · Do not polish the surface.
- Avoid the use of metal sponges or abrasive particles.
- Avoid direct cutting on the surface with ceramic knife, as they are a material with similar hardness to the top.
- For Dekton® Xgloss avoid the direct cutting on the surface.
- Avoid dragging or hitting cooking utensils against worktops of dark colors from the XGloss collection, especially Spectra.
- The Dekton XGloss surface can be damaged by cleaning agents containing acids, bases or salts such as sodium sulphide.



See our web page www.dekton.com for more information, cleaning methods, general maintenance and exposure to chemical substances. In the event of exposure to a chemical not included in this document or the web page, it will be deemed as improper use and will not be covered by the quarantee.

Cosentino* is in accordance with the council directive of 21 December 1998 on the approximation of the laws of the Member States regarding materials and articles intended to come into contact with foodstuffs.



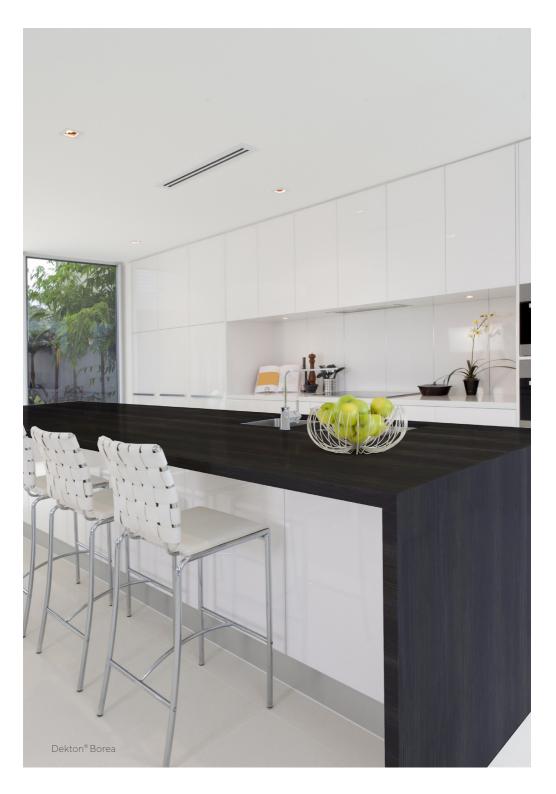

A product designed by **COSENTINO**

COSENTINO UK CENTRAL

Unit 10 Bartley Point / Osborn Way / Hook / Hampshire / RG27 9GX
Tel: +44 (0)1256 761229 / HQ: info.uk@cosentino.com
Warehouse: london@cosentino.com

COSENTINO HEADQUARTERS

Ctra. Baza a Huércal-Overa, km 59. 04850 Cantoria, Almería (Spain) +34 950 444 175 info@cosentino.com www.cosentino.com www.dekton.com ① DektonbyCosentino ② @Dekton









COMPANY WITH MANAGEMENT SYSTEM CERTIFIED BY DNV GL = ISO 9001 =

^{*} See specific warranty conditions.

^{**} Obtain information on colours with NSF certification through www.nsf.org